

FSNF230-S US Technical Data Sheet

On/Off, Spring Return, 350°F [177°C] for half an hour, AC 230 V, 15 s Cycle Time



| Technical Data | |
|------------------------------------|---|
| Power Supply | 230 VAC, ±10%, 50/60 Hz |
| Power consumption in operation | 27 VA |
| Power consumption in rest position | 5 W, 9 VA (60 Hz 6.5 VA), End stop 55 VA, 0.25 A slow blow fuse * |
| Shaft Diameter | 1/2...1.05" round, centers on 1/2" and 3/4" with insert, 1.05" without insert |
| Electrical Connection | 18 GA, 3 ft [1 m], 3 color coded wires |
| Overload Protection | electronic throughout 0...95° rotation |
| Electrical Protection | grounded enclosure, 230 V |
| Angle of rotation | 95° |
| Torque motor | 70 in-lb [8 Nm] from 32...350°F [0...177°C] |
| Direction of motion motor | selectable by ccw/cw mounting |
| Direction of motion fail-safe | reversible with cw/ccw mounting |
| Position indication | Mechanical |
| Running Time (Motor) | 15 s between 32...350°F [0...177°C], <15 s at rated voltage & torque |
| Running time fail-safe | 15 s |
| Ambient humidity | max. 95% r.H., non-condensing |
| Ambient temperature | 32...122°F [0...50°C] |
| Storage temperature | -40...176°F [-40...80°C] |
| Degree of Protection | IP40, NEMA 1 |
| Housing material | galvanized steel |
| Gears | steel, permanently lubricated |
| Agency Listing | cULus listed to UL873 and CAN/CSA C22.2 No.24, UL 2043 Listed for air plenum installation per NEC 300.22 and IMC Section 602 NYC Department of Buildings MEA 197-07-M.California State Fire Marshal Listing 3210-1593:101. |
| Noise level, motor | 45 dB(A) |
| Noise level, fail-safe | 62 dB(A) |
| Servicing | maintenance-free |
| Quality Standard | ISO 9001 |
| Weight | 7.2 lb [3.3 kg] |
| Auxiliary switch | 2 x SPDT, 7 A resistive (2.5 A inductive) @ AC 250 V, one set at 10°, one set at 85° |

† UL File XAPX.E108966

Fire & Smoke damper actuator

Application


The type FSNF spring-return actuator is intended for the operation of smoke and combination fire and smoke dampers in ventilation and air-conditioning systems. The actuator will meet requirements of UL555 and UL555S when tested as an assembly with the damper and will meet requirements of UBC for 15 second opening and closing. Square footage of damper operated will depend on make and model and the temperature required.

Operation

Mounting of the actuator to the damper shaft or jackshaft (3/8" to 1.05") is via a cold-weld clamp. Teeth in the clamp and V-bolt dig into the metal of both solid and hollow shafts maintaining a perfect connection. The specially designed clamp will not crush hollow shafts. The bottom end of the actuator is held by an anti-rotation strap or by a stud provided by the damper manufacturer.

The actuator is mounted in its fail safe position with the damper blade(s) closed. Upon applying power, the actuator drives the damper to the open position. The internal spring is tensioned at the same time. If the power supply is interrupted, the spring moves the damper back to its fail-safe position.

Dimensions (Inches[mm])

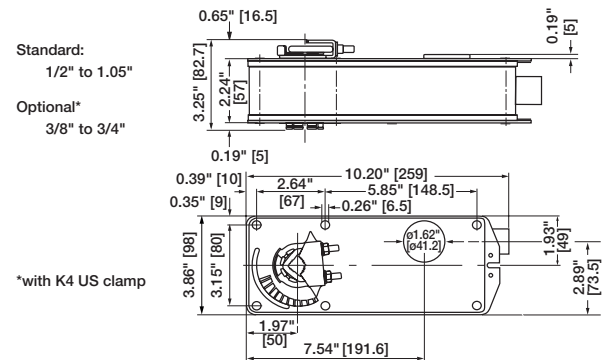

Safety Notes

* Neither UL nor Belimo require local over-current protection. The FSNF actuators draw higher peak current when driving against any type of stop. If used, this requires the value of a local fuse or breaker to be increased to avoid nuisance opening or tripping. A 2.5 A slow blow should be used for AC 24 V. A 0.5 A slow blow should be used for AC 120 V. A 0.25 A slow blow should be used for 230 V and a 0.3 A slow blow for AC 208 V. Transformers: Note that while a 24 V 100 VA transformer would handle 2 actuators, a 4 A breaker or plug fuse is insufficient. A 5 A slow blow would be required. Belimo Fire & Smoke actuators have passed the AMCA 520 and UL 555S Long Term Holding test. No special cycling is required during prolonged periods when actuator is driven open and held there. Periodic testing of dampers and actuators per local codes and NFPA 80 and NFPA 105 are required. The actuator contains no components which the user can replace or repair. A 1/2" threaded connector is standard. FSNFxx-FC models have a 3/8" Flex Connector. Other than the connector, these actuators are identical to the conduit connector version.







| Accessories | |
|-------------|--|
| AF-P | Anti-rotation bracket AF/NF. |
| K4-1 US | Classic AF/NF jackshaft clamp (up to 1.05"). |
| KH-AF-1 US | Classic AF/NF crankarm for Jackshaft to 1.05". |
| SH8 | Push rod for KG6 & KG8 ball joints (36" L, 5/16" diameter). |
| ZDB-AF2 US | Angle of rotation limiter for Classic AF/NF. |
| ZG-100 | Univ. right angle bracket 17"x11-1/8"x6" (HxWxbase). |
| ZG-101 | Univ. right angle bracket 13x11x7-7/16" (HxWxbase). |
| ZG-AF US | Classic AF/NF crankarm adaptor kit. |
| ZG-AF108 | Classic AF/NF crankarm adaptor kit with ZG-108. |
| ZG-DC1 | Damper clip for damper blade, 3.5" width. |
| ZG-DC2 | Damper clip for damper blade, 6" width. |
| ZS-100 | Weather shield - galvaneal 13x8x6" (LxWxD). |
| ZS-150 | Weather shield - PC w/ foam seal 16x8-3/8x4" (LxWxD). |
| ZS-260 | Explosion proof housing. |
| ZS-300 | NEMA 4X, 304 stainless steel enclosure. |
| BAE165 US | 165° F electric thermal sensor, SPST, normally closed. |
| S2A-F US | Auxiliary switch, 2x SPDT, 3A (0.5A inductive) @250 VAC max. |


Typical Specification

All smoke and combination fire and smoke dampers shall be provided with Belimo FSTF, FSLF, FSNF, or FSAF actuators. All substitutions must be approved before submission of bid. Damper and actuator shall have UL 555S Listing for 250°F (350°F). Actuator shall have been tested to UL 2043 per requirements of IMC 602.2 and NEC 300.22 (c). Where position indication is required -S models with auxiliary switches or damper blade switches will be provided per code requirements.


Wiring Diagrams

INSTALLATION NOTES


-  Provide overload protection and disconnect as required.
-  Actuators may be powered in parallel. Power consumption must be observed.
-  S4 makes to S6 when actuator is powered open.
-  Auxiliary switches are for end position indication or interlock control.
-  Double insulated.
-  Ground present on some models.

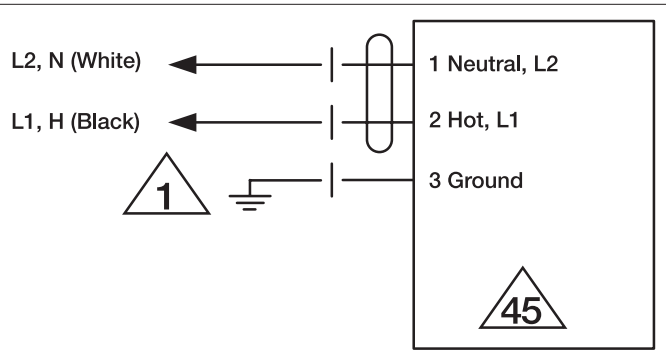


230 VAC

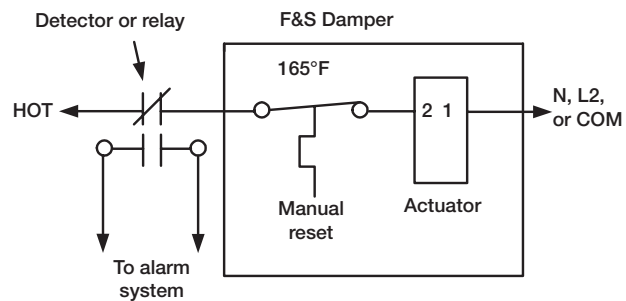

Typical containment damper control wiring

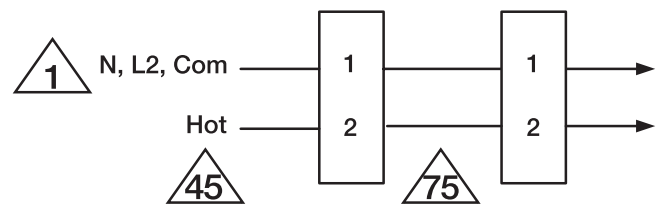

Parallel Actuator Wiring

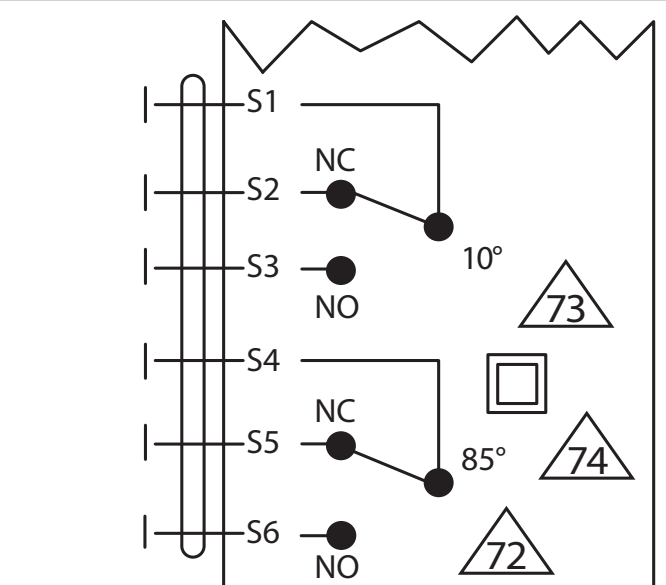

Auxiliary Switch